

# USER MANUAL

## AUDI MMI 2G BASIC

### 1. Introduction

JRDAB-01 device is a DAB/DAB+ radio receiver. It is designed to receive digital radio stations in vehicle equipped with digital sound system. JRDAB-01 supports the "service following" function.

### 2. Start-up

To start listening of digital radio stations from DAB/DAB+ radio receiver, press the RADIO button ① and next press the SOURCE button ② on MMI control panel. Then using main knob ③ of MMI2G system select Digital Radio DAB from list.



fig.1



fig.2

### 3. Searching process

#### **WARNING!**

At first start up of device run a SCAN function to search new stations and add them to list, using main knob of MMI2G system **fig.3**.

## 3.2. Searching process



fig.3



fig.4

## 4. Selecting and changing

After scan process finish, system shows list of available radio services **fig.5**. To select next or previous service use main knob of MMI2G system or buttons under the knob.



Sample list of available radio stations

fig.5



fig.6

## 5. Service Following

The JRDAB-01 device is equipped with the Service Following function for automatic tracking of the selected radio station within the digital transmitters area DAB/DAB+. An additional option is the ability to activate the function in the MMI unit allowing automatic switching of the selected radio station to receive from FM transmitters after DAB/DAB+ digital signal loss. Radio automatically will return to digital reception when it recovers DAB/DAB+ signal. To enable the above-mentioned function, run the SETUP function **fig.7** and activate the Service Following option **fig.8**.



fig.7

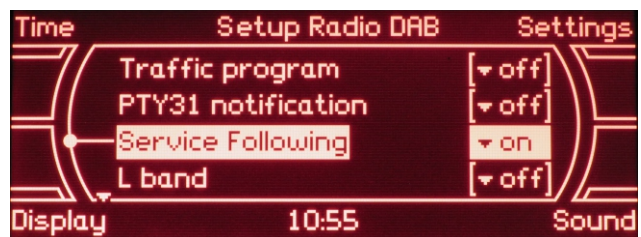


fig.8